

Features

- Radial leaded devices, higher rated voltage up to 75V
- Cured, flame retardant epoxy polymer insulating material meets UL94 V-0 requirements
- Available in lead-free version
- Agency Recognition: UL、CSA、TUV

SEL-TISE




LP75 series


R-line devices

Product Dimensions

Part number	A	B	C	D	E	F	Lead	
	Max.	Max.	Typ.	Min.	Max.	Typ.	Style	Size()
LP75-020	5.9	11.2	5.1	7.6	3.1	1.1	1	0.6
LP75-025	6.1	11.4	5.1	7.6	3.1	1.1	1	0.6
LP75-030	7.6	13.4	5.1	7.6	3.1	1.1	1	0.6
LP75-040	7.7	13.6	5.1	7.6	3.1	1.1	1	0.6
LP75-050	7.9	13.7	5.1	7.6	3.1	1.1	1	0.6
LP75-065	9.7	14.5	5.1	7.6	3.1	1.1	1	0.6
LP75-075	10.7	15.5	5.1	7.6	3.1	1.1	1	0.6
LP75-090	11.7	16.5	5.1	7.6	3.1	1.1	1	0.6
LP75-110	13.0	16.7	5.1	7.6	3.1	1.4	2	0.8
LP75-135	15.7	17.6	5.1	7.6	3.1	1.4	2	0.8
LP75-160	16.7	19.7	5.1	7.6	3.1	1.4	2	0.8
LP75-185	17.8	22.9	5.1	7.6	3.1	1.4	2	0.8
LP75-250	21.3	23.5	10.2	7.6	3.1	1.4	2	0.8
LP75-300	24.9	27.4	10.2	7.6	3.1	1.4	2	0.8
LP75-375	28.5	32.5	10.2	7.6	3.1	1.4	2	0.8

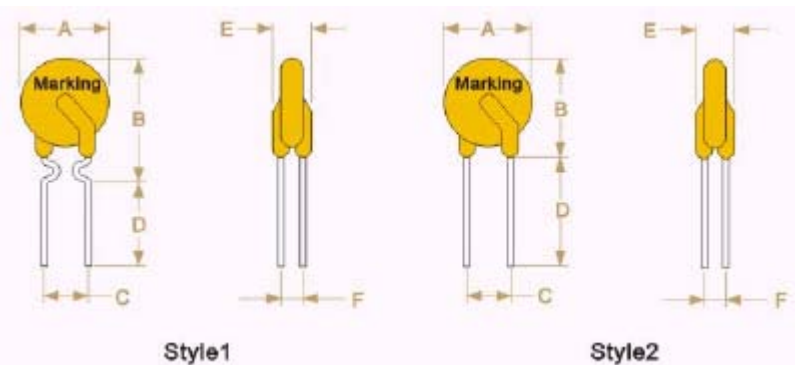

Marking system

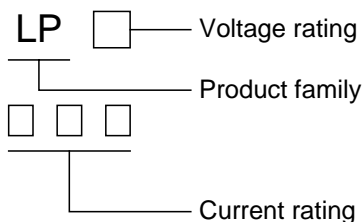

* Lead materials: Tin-plate metal wire.

* Lead-free devices are available, the right logo is lead-free mark of wayon.



Electrical Characteristics

Part number	I _H (A)	I _T (A)	T _{trip} (S)	V _{max} (V)	I _{max} (A)	Pd _{typ} (W)	R _{min} ()	R _{max} ()
LP75-020	0.20	0.40	3.6	75	40	0.52	1.50	2.84
LP75-025	0.25	0.50	3.2	75	40	0.52	1.00	1.95
LP75-030	0.30	0.60	3.0	75	40	0.59	0.76	1.36
LP75-040	0.40	0.80	3.8	75	40	0.66	0.52	0.86
LP75-050	0.50	1.00	4.0	75	40	0.80	0.41	0.77
LP75-065	0.65	1.30	5.3	75	40	0.90	0.27	0.48
LP75-075	0.75	1.50	6.3	75	40	0.95	0.18	0.40
LP75-090	0.90	1.80	7.2	75	40	1.00	0.14	0.31
LP75-110	1.10	2.20	8.2	75	40	1.51	0.14	0.25
LP75-135	1.35	2.70	9.6	75	40	1.71	0.12	0.19
LP75-160	1.60	3.20	11.4	75	40	1.98	0.09	0.14
LP75-185	1.85	3.70	12.6	75	40	2.10	0.08	0.12
LP75-250	2.50	5.00	15.6	75	40	2.50	0.05	0.08
LP75-300	3.00	6.00	19.8	75	40	2.80	0.04	0.06
LP75-375	3.75	7.50	24.0	75	40	3.20	0.03	0.05

I_H=Hold current: maximum current at which the device will not trip at 25 still air.

I_T=Trip current: minimum current at which the device will always trip at 25 still air.

V_{max}=Maximum voltage device can withstand without damage at rated current.

I_{max}=Maximum fault current device can withstand without damage at rated voltage.

T_{trip}=Maximum time to trip(s) at assigned current.

Pd_{typ}=Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min}=Minimum device resistance at 25 prior to tripping.

R_{max}=Maximum device resistance at 25 prior to tripping.

Thermal Derating Chart-I_H(A)


Part number	Maximum ambient operating temperatures()								
	-40	-20	0	25	40	50	60	70	85
LP75-020	0.34	0.29	0.25	0.20	0.16	0.14	0.13	0.10	0.07
LP75-025	0.42	0.36	0.31	0.25	0.20	0.18	0.16	0.12	0.09
LP75-030	0.52	0.44	0.38	0.30	0.24	0.22	0.18	0.14	0.10
LP75-040	0.66	0.57	0.50	0.40	0.32	0.29	0.24	0.20	0.14
LP75-050	0.83	0.74	0.63	0.50	0.41	0.36	0.30	0.25	0.18
LP75-065	1.10	0.95	0.82	0.65	0.53	0.47	0.40	0.33	0.24
LP75-075	1.26	1.11	0.95	0.75	0.61	0.54	0.45	0.39	0.28
LP75-090	1.52	1.30	1.15	0.90	0.73	0.65	0.55	0.47	0.33
LP75-110	1.82	1.60	1.35	1.10	0.89	0.79	0.65	0.55	0.40
LP75-135	2.20	1.91	1.65	1.35	1.09	0.96	0.80	0.68	0.50
LP75-160	2.60	2.30	1.95	1.60	1.30	1.13	1.00	0.80	0.60
LP75-185	3.00	2.63	2.30	1.85	1.50	1.33	1.12	0.92	0.67
LP75-250	4.05	3.58	3.02	2.50	2.02	1.80	1.55	1.30	0.90
LP75-300	4.82	4.16	3.62	3.00	2.43	2.16	1.85	1.50	1.09
LP75-375	6.02	5.19	4.50	3.75	3.02	2.68	2.30	1.95	1.39

Test Procedures And Requirements

Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ 25	R _{min} R R _{max}
Time to Trip	Specified current, V _{max} , 25	T maximum Time to Trip
Hold Current	30min, at I _H	No trip
Trip Cycle Life	V _{max} , I _{max} , 100cycles	No arcing or burning
Trip Endurance	V _{max} , 24hours	No arcing or burning

Typical Time-to-Trip Charts at 25

A=LP75-020
 B=LP75-025
 C=LP75-030
 D=LP75-040
 E=LP75-050
 F=LP75-065
 G =LP75-075
 H=LP75-090
 I = LP75-110
 J =LP75-135
 K=LP75-160
 L=LP75-185
 M=LP75-250
 N=LP75-300
 O=LP75-300

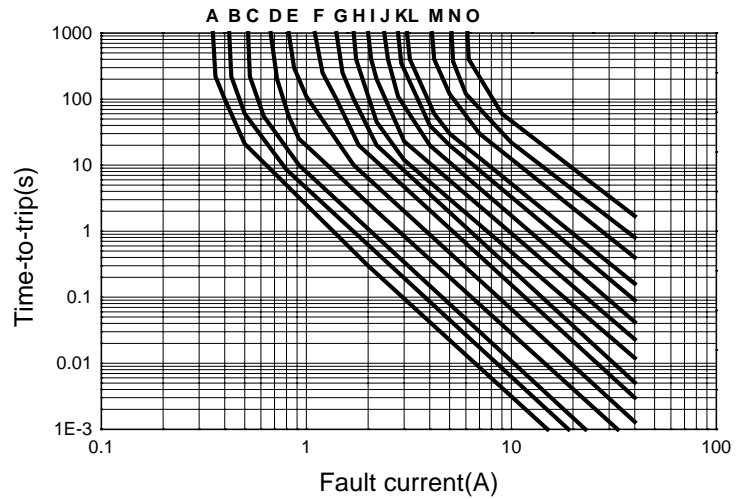

Package Information

Bulk:

LP75-020~LP75-065.....1000pcs per bag
 LP75-075~LP75-135.....500pcs per bag
 LP75-160~LP75-375.....1000pcs per bag

Tape & Reel:

LP75-020~LP75-090.....3000pcs per reel
 LP75-110~LP75-160.....1500pcs per reel
 LP75-185~LP75-375.....1000pcs per reel